

YETDA INDUSTRY LTD.

Technical Data Sheet

MODEL NO : 155ANRANB4-R

Features :

- Package in 8mm tape on 7" diameter reel
- Compatible with automatic placement equipment
- Compatible with reflow solder process


Applications :

- Indicators
- Automotive : backlighting in dashboard and switch
- Backlight for LCD

Dice material	Emitted color	Lens Color
AlGaN/P/GaAs	Red	Water transparent
InGaN	Blue	

Electrical/Optical Characteristics(Ta=25°C)

Parameter	Test Condition	Symbol	Value			Unit
			Min	Typ	Max	
Spectral half bandwidth	I _F =20mA	△ λ	R	18		nm
			B	25		
Dominant wavelength	I _F =20mA	λ D	R	630	640	nm
			B	460	465	
Forward voltage	I _F =20mA	V _F	R	1.7	2.0	V
			B	2.8	3.1	
Luminous intensity	I _F =20mA	I _V	R	50	65	mcd
			B	40	50	
Viewing angle at 50% I _V	I _F =10mA	2θ 1/2		140		Deg
Reverse current	V _R =5V	I _R			10	μA





YETDA INDUSTRY LTD.




Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Value			Unit
		R		B	
Power dissipation	Pd	75		111	mW
Forward current	I _F		30		mA
Reverse voltage	V _R		5		V
Operating temperature range	T _{Op}		-40 ~ +80		°C
Storage temperature range	T _{Stg}		-40 ~ +85		°C
Peak pulsing current (1/8 duty f=1kHz)	I _{FP}		125		mA

PACKAGING DIMENSIONS (mm):

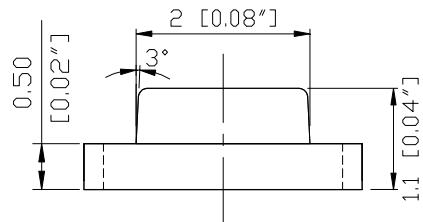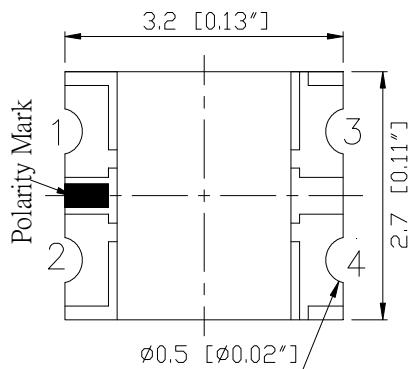


RECOMMEND PAD LAYOUT

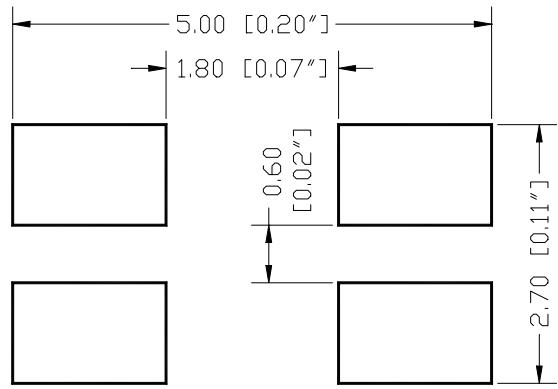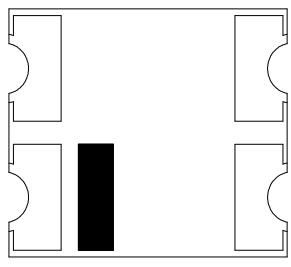

NOTES:


1. All dimensions are in millimeters (inches);
2. Tolerances are ±0.1mm (0.004inch) unless otherwise noted.




YETDA INDUSTRY LTD.

Typical Electro-Optical Characteristics Curve:


Relative Intensity vs. Wavelength

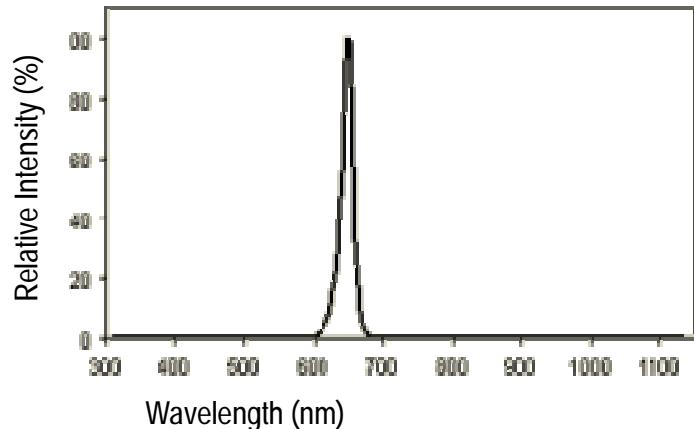


Forward Current vs. Forward Voltage

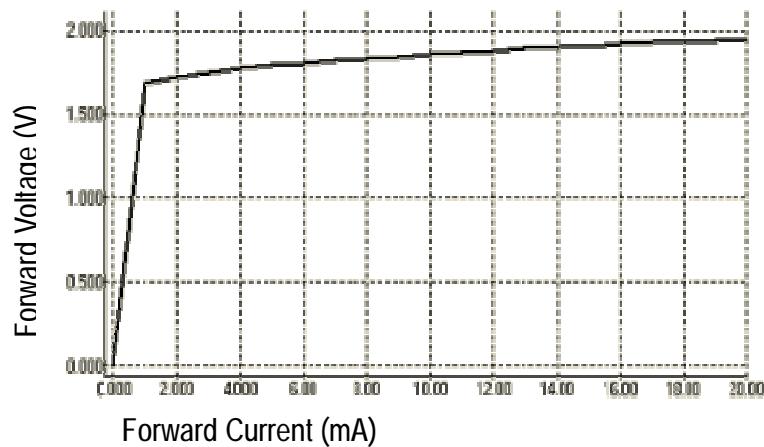

Directive Characteristics

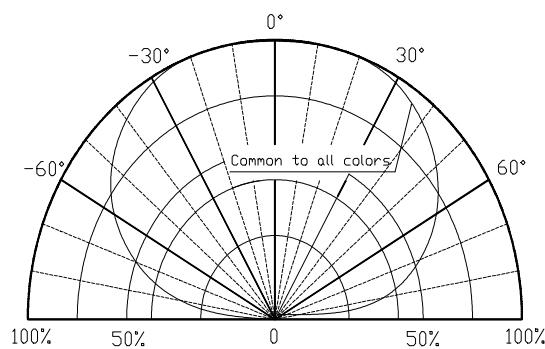





YETDA INDUSTRY LTD.

Typical Electro-Optical Characteristics Curve:


Relative Intensity vs. Wavelength

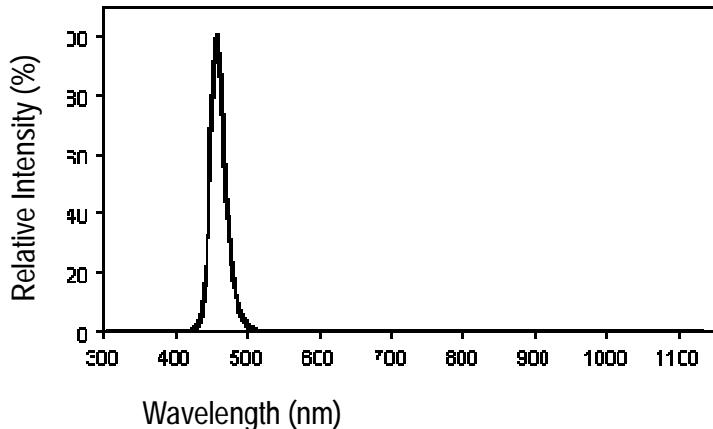


Forward Current vs. Forward Voltage

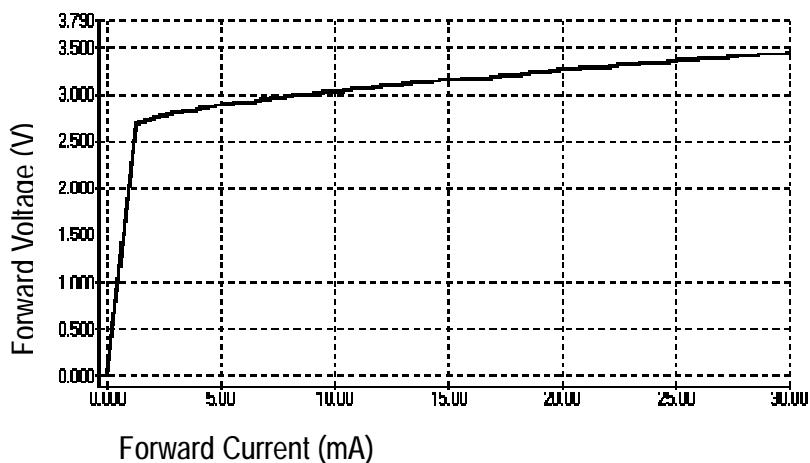


Directive Characteristics

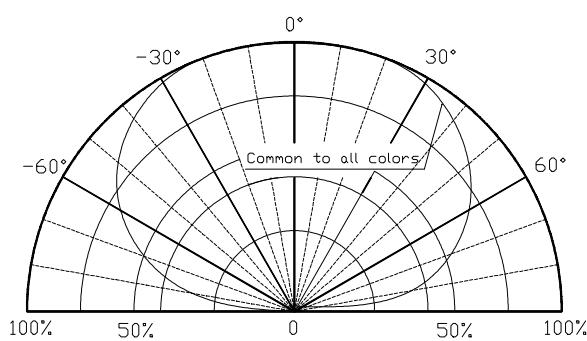




YETDA INDUSTRY LTD.


Feeding Direction

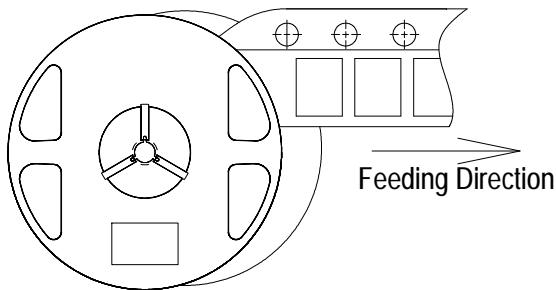


Dimensions of Reel (Unit: mm)

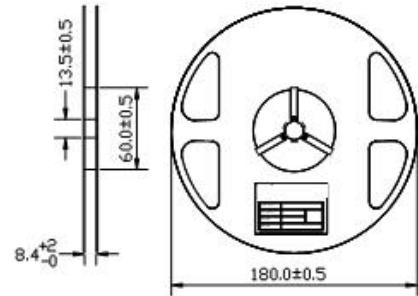

Dimensions of Tape (Unit: mm)

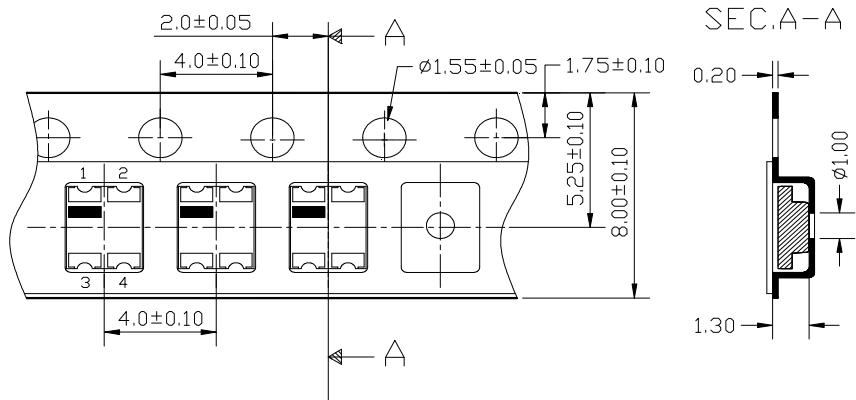


Arrangement of Tape

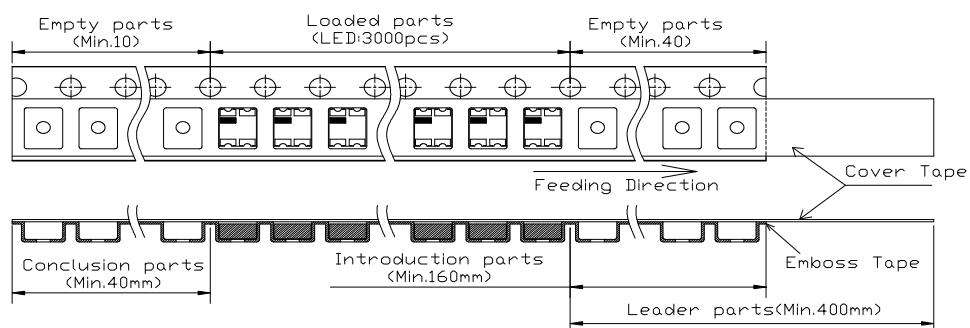

NOTES

1. Empty component pockets are sealed with top cover tape;
2. The maximum number of missing lamps is two;
3. The polarity mark is oriented towards the tape sprocket hole ;
4. 3,000pcs/Reel.



YETDA INDUSTRY LTD.

Precautions For Use :


Over - current - proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen)

Storage


1. The operation of temperature and R.H. are : $5^{\circ}\text{C} \sim 30^{\circ}\text{C}$, 60%R.H. Max.
2. Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent. Considering the tape life, we suggest our customers to use our products within 1.5 year (from production date).
3. It's recommended to bake before soldering when the package is unsealed after 72 hrs. The condition is : $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 15hrs.

■ Reflow Temp/Time

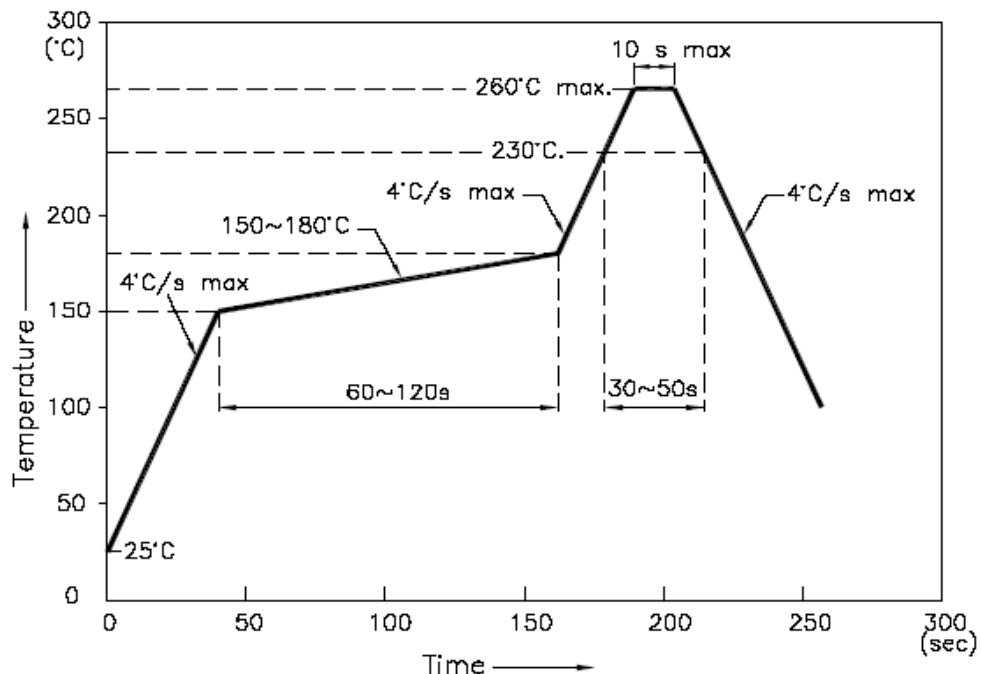

NOTES:

1. We recommend the reflow temperature $245^{\circ}\text{C} (\pm 5^{\circ}\text{C})$. the maximum soldering temperature should be limited to 260°C .
2. dont cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.




YETDA INDUSTRY LTD.

■ Soldering iron

Basic spec is ≤ 5 sec when 260°C . If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow -1\text{sec}$). Power dissipation of iron should be smaller than 20W, and temperatures should be controllable .Surface temperature of the device should be under 230°C .

■ Rework

1. Customer must finish rework within 5 sec under 260°C .
2. The head of iron can not touch copper foil
3. Twin-head type is preferred.

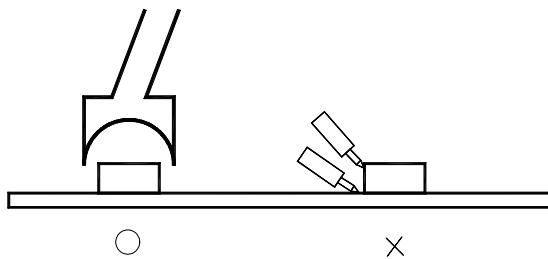

■ Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow 、 solder etc.