YETDA INDUSTRY LTD.



1.8mm Superbright Red LED Lamps Q100HCH4G

* 1.8mm Red Superbright Dice.


* Encapsulated with Water Clear Package with 2 leads.

Absolute Maximum Ratings : (Ta=25°C)

Parameter	Symbol	Maximum Rating	Unit					
Power Dissipation	Pd	100	mw					
Reverse Voltage	VR	5	V					
Average Forward Current	LAF	30	mA					
Peak Forward Current (Duty=0.1,10KHZ)	IPF	200	mA					
Opertating Temperature Range	Topr	-20°C to +80	°C					
Storage Temperature Range	Tstg	-40°C to +100	°C					
Lead Soldering Temperature {1.6mm(0.063inch) From Body} 260°C For 3 Seconds								

Electro-Optical Characteristics ($Ta = 25^{\circ}C$)

Parameter	Test Condition	Symbol	Min.	Тур.	Max.	Unit
Forward Voltage	IF = 20mA	VF	2.0		2.4	V
Reverse Current	Vr =5V	IR			10	uA
Luminous Intensity	IF = 20mA	Iv	2000		2500	mcd
Wavelength	IF = 20mA	λd		625		
Viewing Angle	IF = 20mA	2 0 1/2		60		deg

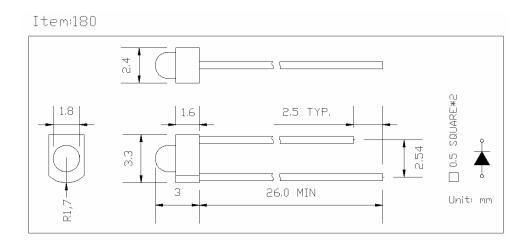




YETDA INDUSTRY LTD.

Typical Electro-Optical Characteristics Curve:


Fig 1. Forward Current vs. Forward Voltage





3.0


2.5



Forward Current [mA]

Fig 2. Relative Intensity vs. Forward Current

Fig 3. Forward Voltage vs. Temperature









Fig 5. Relative Intensity vs. Wavelength



YETDA INDUSTRY LTD.




•Soldering:

1. Manual of soldering


The temperature of the iron tip should not be higher than 260° C and Soldering within 3 seconds per solder-land is to be observed 2. DIP soldering (Wave Soldering): Preheating: 120° C ~150°C within 5 sec.260°C (Max)

Gradual Cooling (Avoid quenching)

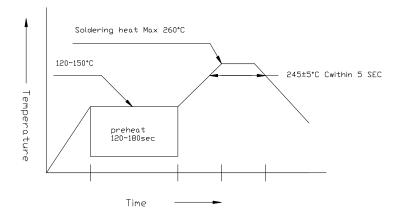

3. Reflow Soldering

Preheating: 140° C ~ 160° C ±5 °C ,within 2 minutes. Operation heating: 235° C (Max)within 10 seconds(Max) Gradual Cooling (Avoid quenching)

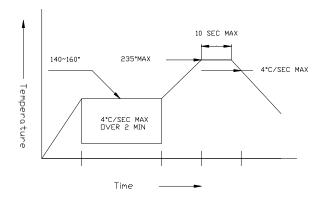

•Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook