



YETDA INDUSTRY LTD.

0.36" SINGLE DIGIT BLUE LED DISPLAY

S-3611AB11

DESCRIPTION

- * 0.36" (9.10mm) Inch Digit Height.
- * Ultra Bright Blue Display.
- * Black Face and White Segment Color.
- * Common Cathode.

ABSOLUT MAXIMUM RATINGS AT Ta=25°C

| Parameter | | UNIT |
|-----------------------------------|---|------|
| Power Dissipation Per Seg. | 40 | mW |
| Peak Forward Current Per Seg. | 120 | mA |
| Forward current Per Seg. (Static) | 30 | mA |
| Reverse Voltage Per Seg. | 5 | V |
| Operation Temperature Range | -25°C TO +80°C | °C |
| Storage Temperature Range | -25°C TO +100°C | °C |
| Lead Soldering Temperature | 260°C for 3 seconds 1.6mm(1/16 inch) from body | |


ELECTRICAL/OPTOTICAL CHARACTERISTIC AT Ta=25°C

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | CONDITION |
|-----------------------------------|-------------|-------|------|------|------|-----------|
| Average Luminous Intensity | Iv | 35 | 45 | | mcd | If=20mA |
| Emission Wavelength | λ d | | 470 | | nm | If=20mA |
| Forward Voltage Per Seg. | Vf | | 3.2 | 3.8 | V | If=20mA |
| Reverse Current Per Seg. | Ir | | | 10 | uA | Vr=5V |
| Luminous Intensity Matching Ratio | Iv-m | 2 : 1 | | | | If=20mA |




YETDA INDUSTRY LTD.

P.C.B. Pin Connection

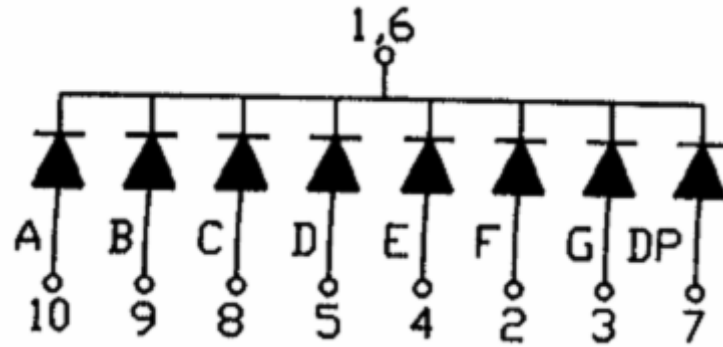

Reflector Dimensions

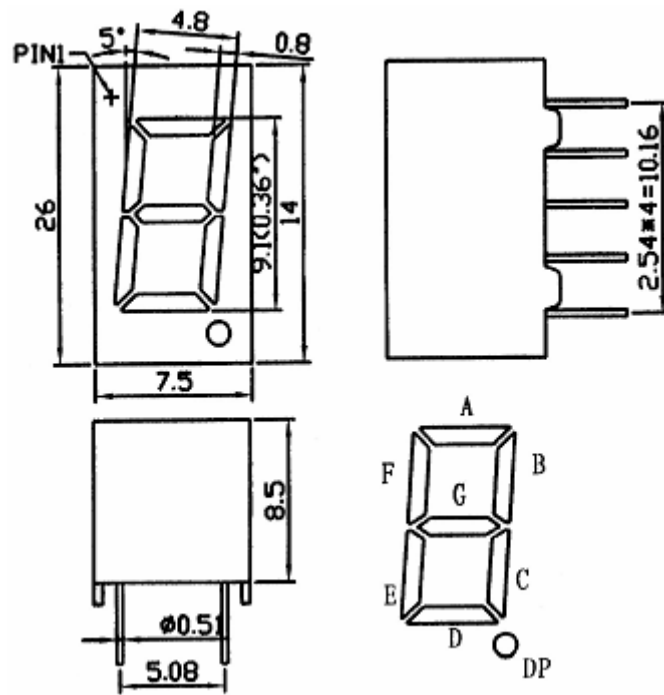

Unit:mm