



YETDA INDUSTRY LTD.

Technical Data Sheet

MODEL NO : S194ANW4-G

0603 Package 1.6*0.8*0.4 mm SMD LED

Features :

- Lens Molding
- Compatible with automatic placement equipment
- Compatible with reflow solder process

Applications :

- Indicators
- Automotive : backlighting in dashboard and switch
- Backlight for LCD

Dice material	Emitted color	Lens Color
InGaN	White	Yellow diffused

Electrical/Optical Characteristics(Ta=25°C)

Parameter	Test Condition	Symbol	Value			Unit
			Min	Typ	Max	
Forward voltage	IF=20mA	VF	2.8	3.1	3.7	V
CIE Coordinates	IF=20mA	X		0.28		
		Y		0.29		
Luminous intensity	IF=20mA	Iv	250	450	800	Lm
Viewing angle at 50% Iv	IF=20mA	2θ 1/2		140		Deg
Reverse current	VR=5V	IR			10	μA

Absolute Maximum Ratings(Ta=25°C)


Parameter	Symbol	Value	Unit
Power dissipation	Pd	111	mW
Forward current	IF	30	mA
Reverse voltage	VR	5	V
Operating temperature range	Top	-40 ~+80	°C
Storage temperature range	Tstg	-40 ~+85	°C
Peak pulsing current (1/8 duty f=1kHz)	I _{fp}	125	mA

2016FEB10Y




YETDA INDUSTRY LTD.

PACKAGING DIMENSIONS

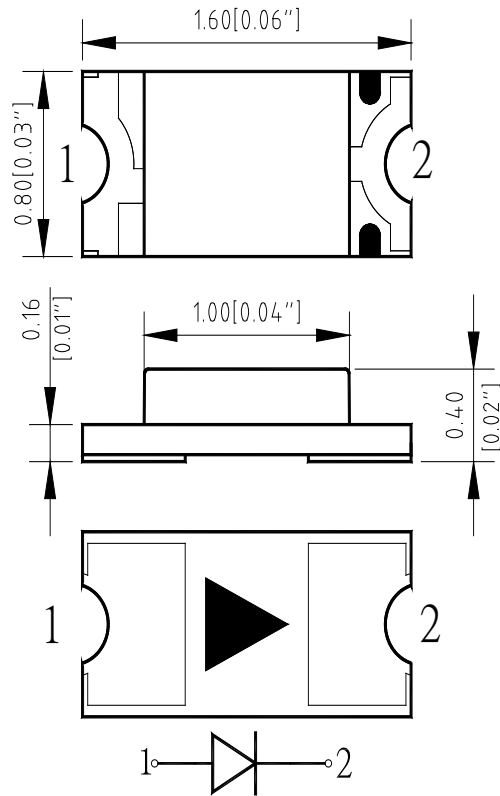

RECOMMEND PAD LAYOUT

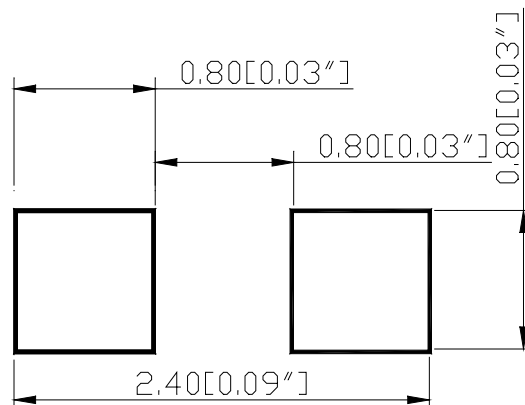



Typical Electro-Optical Characteristics Curve:

Fig 1. Forward Current vs. Forward Voltage

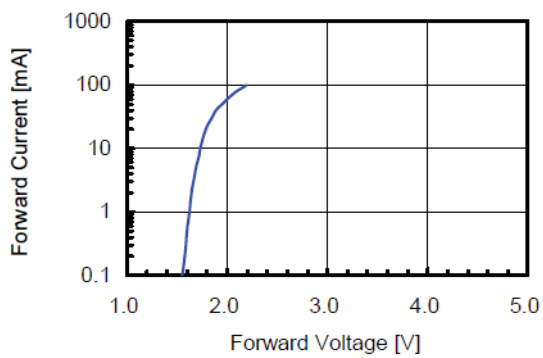


Fig 2. Relative Intensity vs. Forward Current

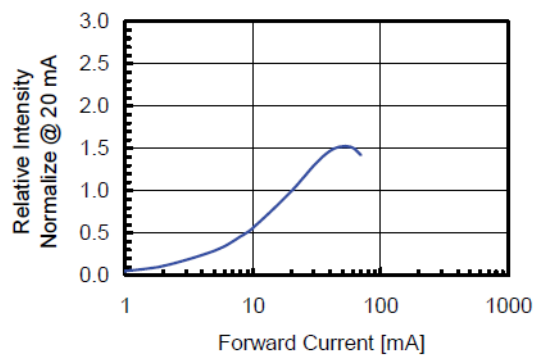


Fig 3. Forward Voltage vs. Temperature


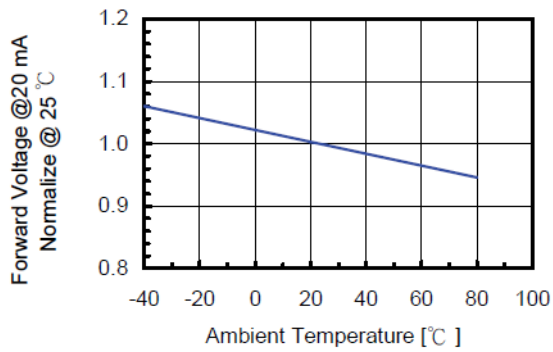



Fig 4. Relative Intensity vs. Temperature



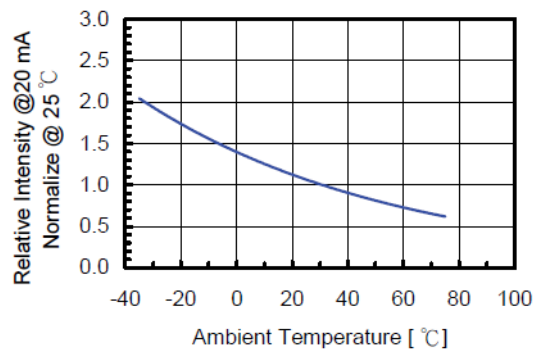

Soldering Profile

Reflow Soldering Profile For Lead-free SMT Process.

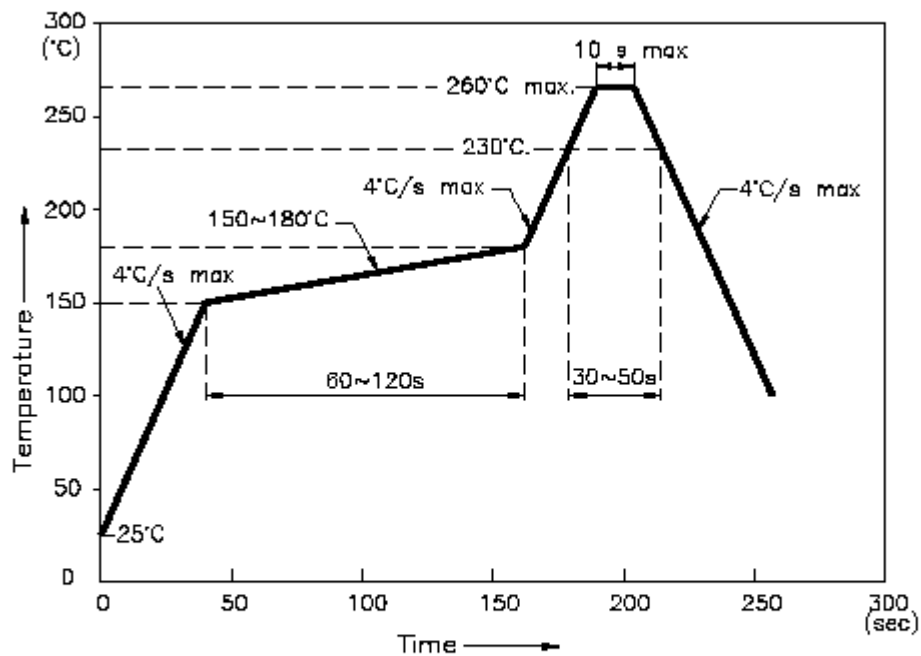


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.




YETDA INDUSTRY LTD.


- Feeding Direction

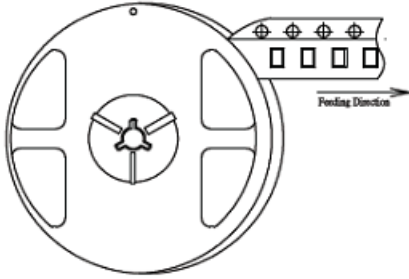


- Dimensions of Reel (Unit: mm)

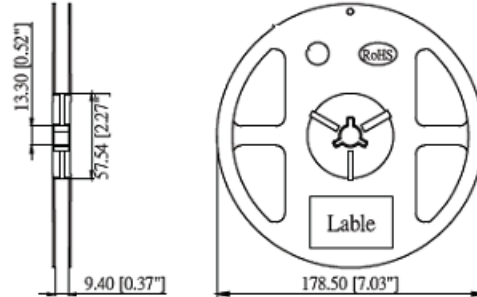

- Dimensions of Tape (Unit: mm)

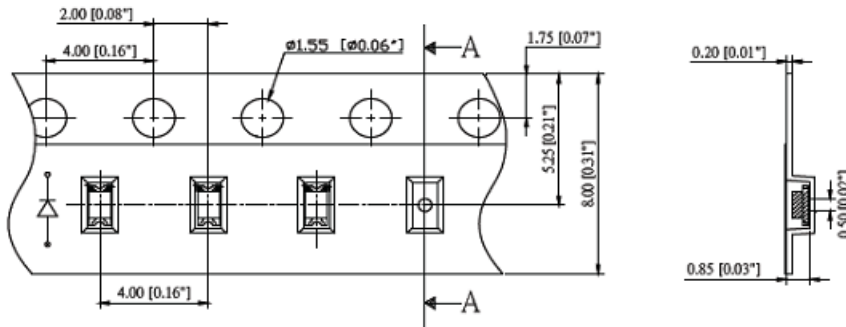

- Arrangement of Tape

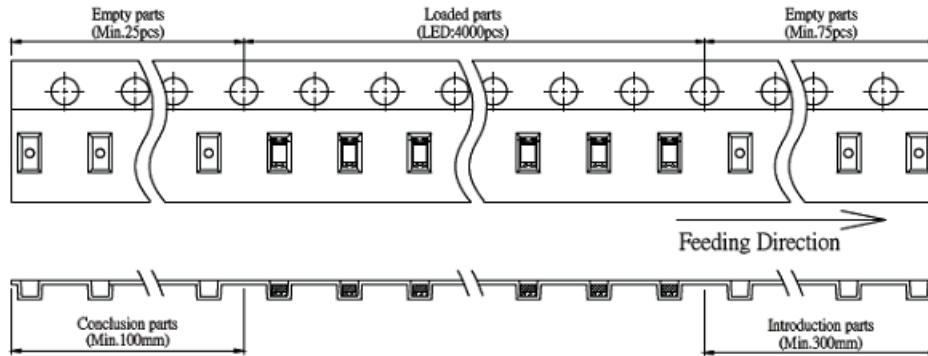

Notes:

1. Empty component pockets are sealed with top cover tape;
2. The maximum number of missing lamps is two;
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
4. 4,000 pcs/Reel.