



YETDA INDUSTRY LTD.

5mm Super Bright Pure-green LED Lamps with resistor chip S500TGCR1H-5V

- 5mm with Super Bright InGaN + Resistor Dice ◦
- Encapsulated with Green diffused lens Package ◦
- Long Leads ◦

Absolute Maximum Ratings :


Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating Temperature Range	-25°C to +80°C	
Storage Temperature Range	-35°C to +85°C	
Lead Soldering Temperature	260°C for 3 seconds	

Electro-Optical Characteristics (Ta = 25°C)

Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	If = 20mA	Vf		5		V
Reverse Current	Vr = 5V	Ir			10	uA
Luminous Intensity	If = 20mA	Iv	250	350	450	mcd
Spectral Bandwidth	If = 20mA	$\Delta\lambda$				nm
Wavelength	If = 20mA	λ_p		525		nm
		λ_d	515	520	525	nm
Half View Angle	If = 20mA	2 $\theta_{1/2}$		80		deg

Package

Item: 500

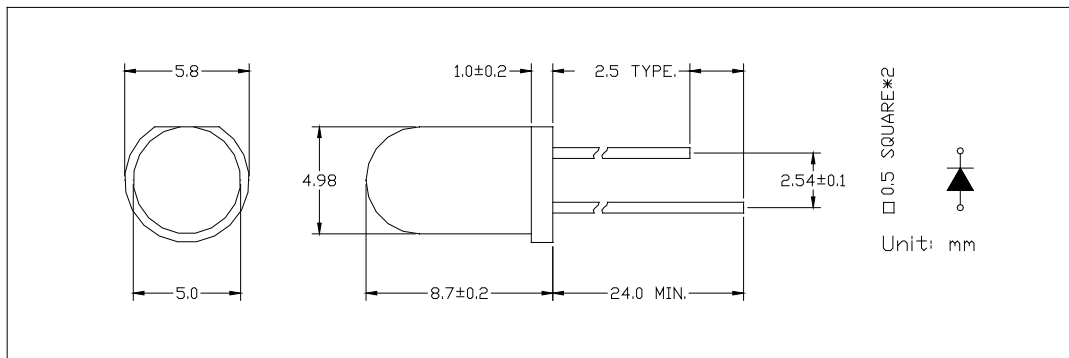

2016SEPT01Y



YETDA INDUSTRY LTD.

•Soldering:

1. Manual of soldering


The temperature of the iron tip should not be higher than 260 °C and

Soldering within 3 seconds per solder-land is to be observed

2. DIP soldering (Wave Soldering):

Preheating: 120 °C ~ 150°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching)

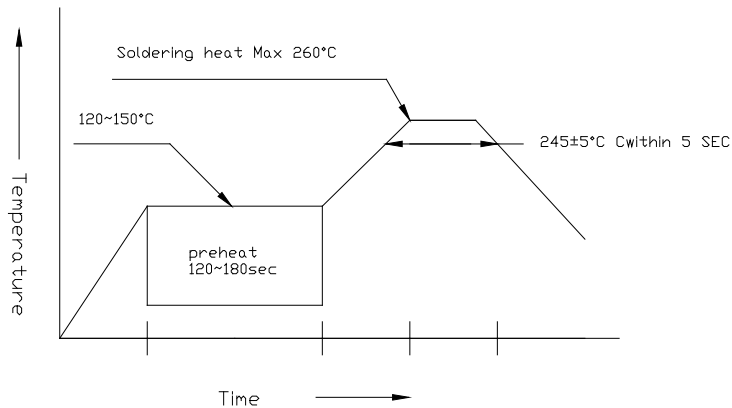


3. Reflow Soldering

Preheating: 140 °C ~ 160°C ±5°C, within 2 minutes.

Operation heating: 235 °C (Max) within 10 seconds (Max)

Gradual Cooling (Avoid quenching)

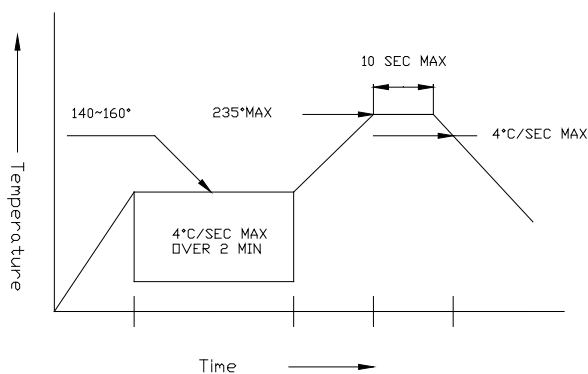

•Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook