

YETDA INDUSTRY LTD.

Technical Data Sheet

MODEL NO : 115R/ANB4-BH

Features :

- Package in 8mm tape on 7" diameter reel
- Compatible with automatic placement equipment
- Compatible with reflow solder process

Applications :


- Indicators
- Automotive : backlighting in dashboard and switch
- Backlight for LCD

Dice material	Emitted color	Lens Color
AlGaInP/GaAs	Red	Water transparent
InGaN	Blue	

Electrical/Optical Characteristics(Ta=25°C)

Parameter	Test Condition	Symbol	Value			Unit	
			Min	Typ	Max		
Spectral half bandwidth	I _F =20mA	$\Delta \lambda$	R		20	nm	
			B		25		
Dominant wavelength	I _F =20mA	λ_D	R	620		625	nm
			B	465		470	
Forward voltage	I _F =20mA	V _F	R	2.0		2.4	V
			B	2.8		3.4	
Luminous intensity	I _F =20mA	I _v	R		120		mcd
			B		150		
Viewing angle at 50% I _v	I _F =10mA	2θ 1/2			120		Deg
Reverse current	V _R =5V	I _R				10	μA

21 JUN 2023H




YETDA INDUSTRY LTD.

Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Value			Unit
		R		B	
Power dissipation	Pd	72		100	mW
Forward current	I _F	20			mA
Reverse voltage	V _R	5			V
Operating temperature range	Top	-40 ~+80			°C
Storage temperature range	Tstg	-40 ~+85			°C
Peak pulsing current (1/8 duty f=1kHz)	I _{FP}	100			mA


PACKAGING DIMENSIONS (mm):

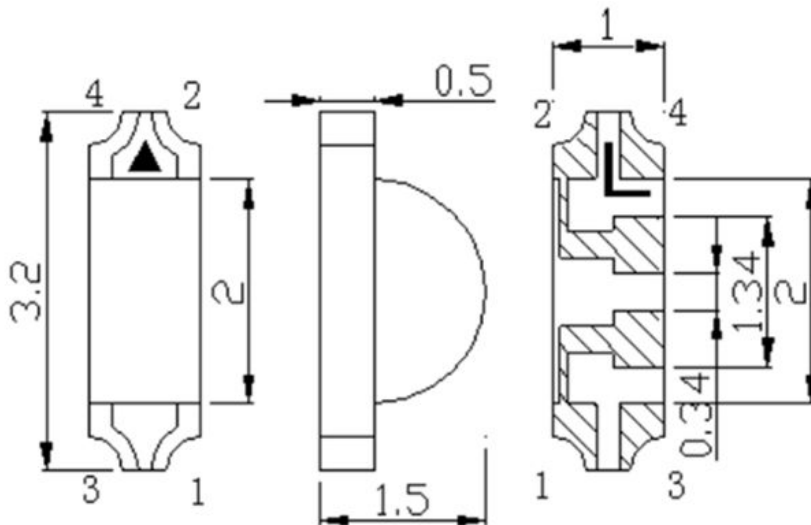

Notes: (备注)

1. All dimension units are millimeters. (所有标注尺寸单位为毫米)

2. All dimension tolerance is $\pm 0.15\text{mm}$ unless otherwise noted. (除特别标注外, 所有尺寸允许公差 $\pm 0.15\text{mm}$)




YETDA INDUSTRY LTD.

Feeding Direction	Dimensions of Reel (Unit: mm)

Dimensions of Tape (Unit: mm)

Arrangement of Tape


NOTES
<ol style="list-style-type: none"> 1. Empty component pockets are sealed with top cover tape; 2. The maximum number of missing lamps is two; 3. The polarity mark is oriented towards the tape sprocket hole ; 4. 3,000pcs/Reel.




YETDA INDUSTRY LTD.

RED:


Relative Intensity vs. Wavelength

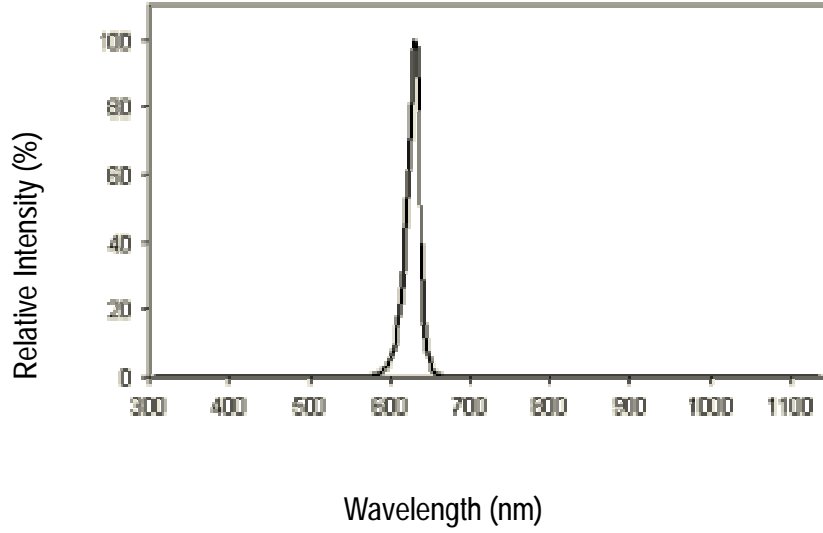


Forward Current vs. Forward Voltage

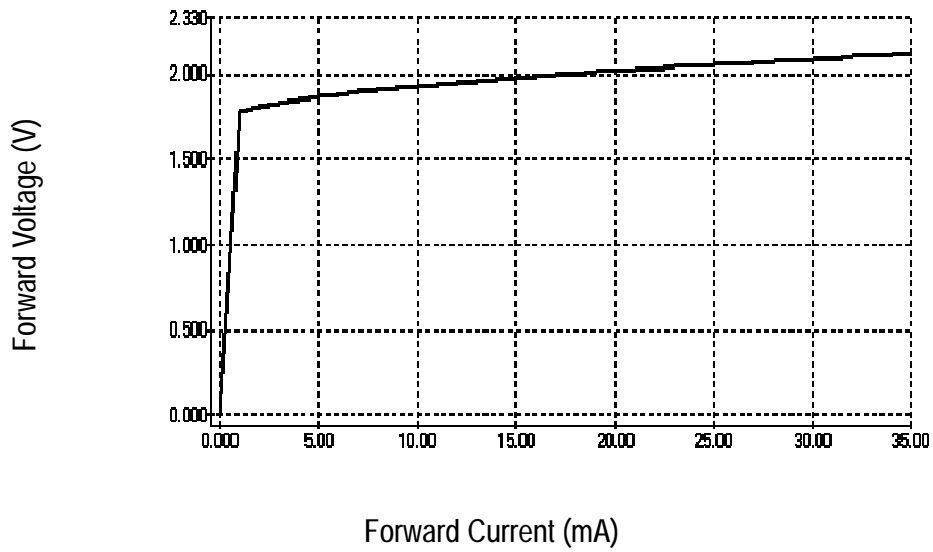

Directive Characteristics

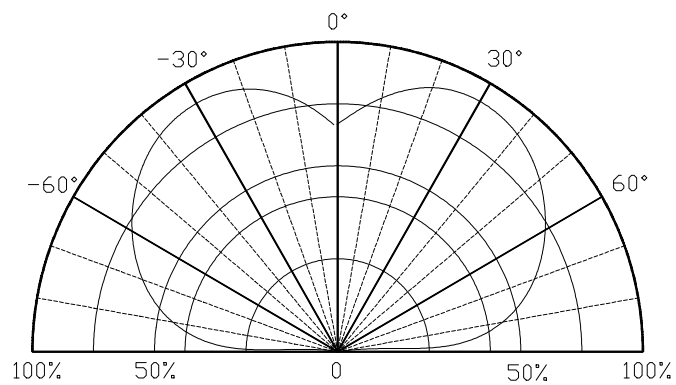





YETDA INDUSTRY LTD.

BLUE


Relative Intensity vs. Wavelength

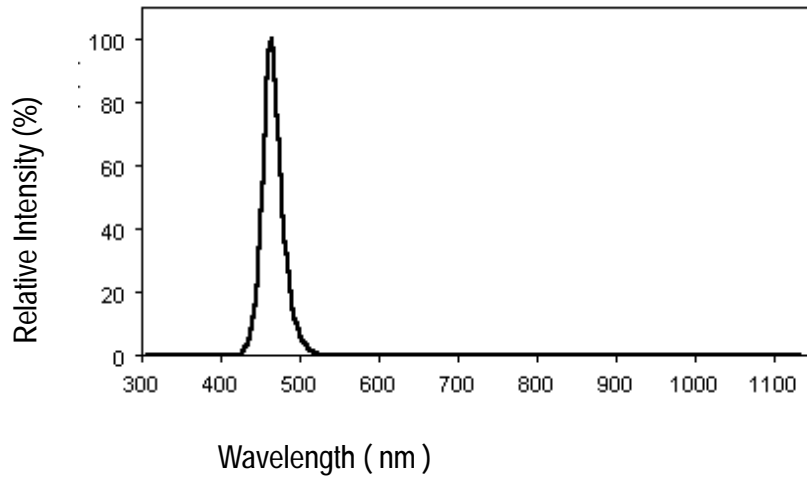


Forward Current vs. Forward Voltage

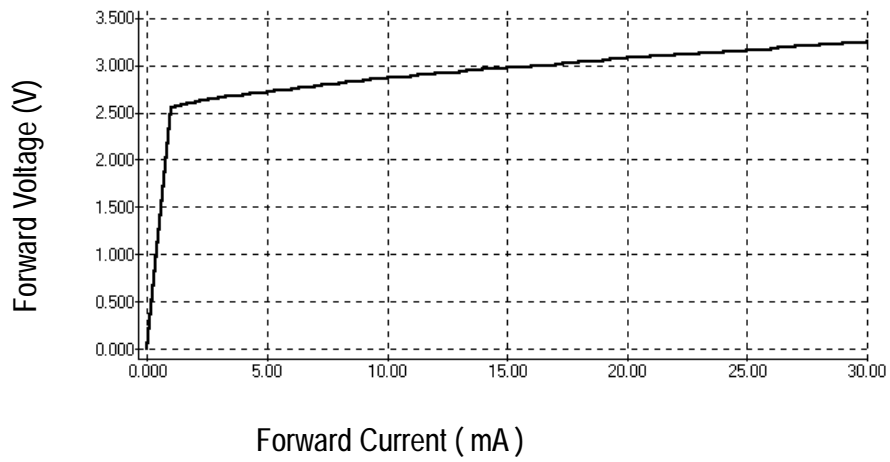

Directive Characteristics

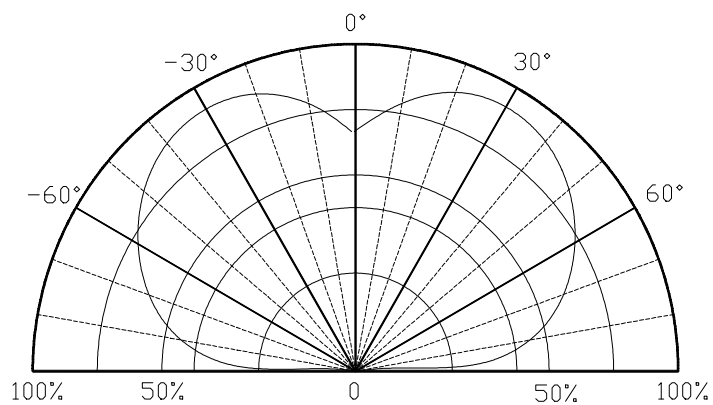




YETDA INDUSTRY LTD.


Precautions For Use :
Over - current - proof
Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen)
Storage
1. The operation of temperature and R.H. are : $5^{\circ}\text{C} \sim 30^{\circ}\text{C}$, 60%R.H. Max.
2. Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a dampproof box with desiccating regent. Considering the tape life, we suggest our customers to use our products within 1.5 year (from production date) .
3. It's recommended to bake before soldering when the package is unsealed after 72 hrs. The condition is : $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 15hrs.

■ Reflow Temp/Time

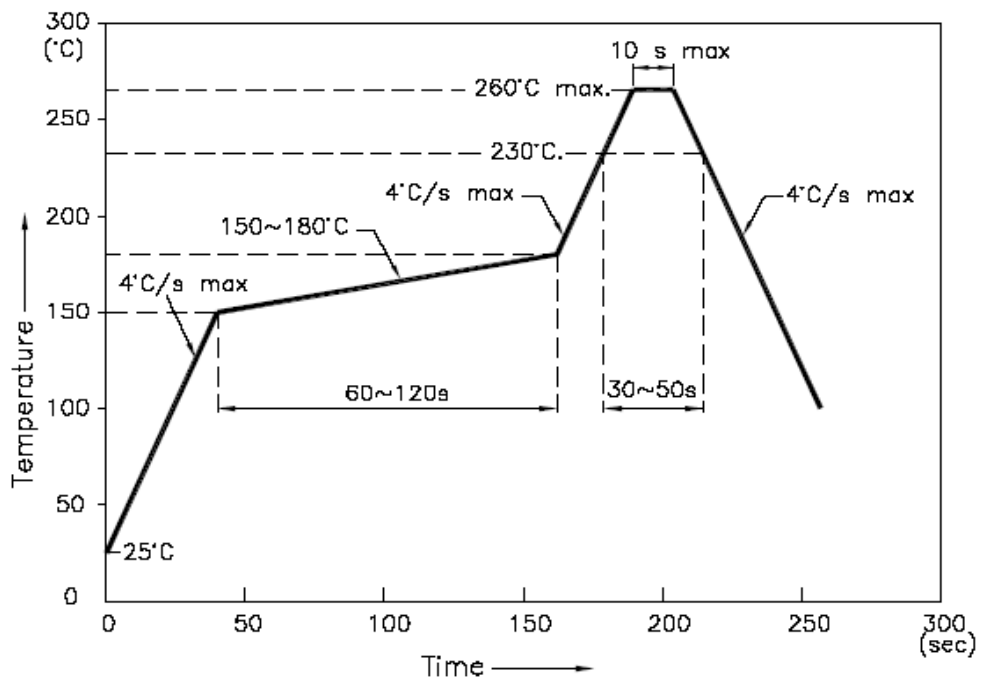

NOTES:

1. We recommend the reflow temperature $245^{\circ}\text{C} (\pm 5^{\circ}\text{C})$. the maximum soldering temperature should be limited to 260°C .
2. dont cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.




YETDA INDUSTRY LTD.

■Soldering iron

Basic spec is $\leq 5\text{sec}$ when 260°C . If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow -1\text{sec}$). Power dissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under 230°C .

■Rework

1. Customer must finish rework within 5 sec under 260°C .
2. The head of iron can not touch copper foil
3. Twin-head type is preferred.

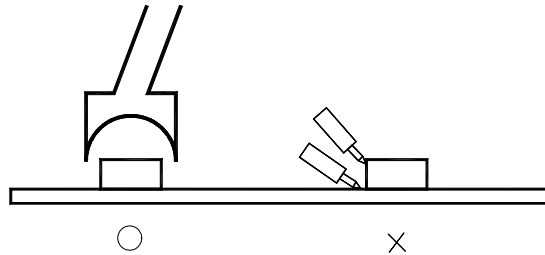

- Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow 、 solder etc.