



YETDA INDUSTRY LTD.

3mm Orange LED Lamps 300A1G

3 mm with GaAsP/GaP dice ◦

Encapsulated with Orange Diffused package ◦

Long Leads ◦

Absolute Maximum Ratings :


Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-50°C to +100°C	
Lead Soldering Temperature	260°C for 3 seconds 1.6mm(0.063 inch) from body	

Electro-Optical Characteristics (Ta = 25°C)

Parameter Radiant	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	I _F = 20mA	V _F		2.20	2.60	V
Reverse Current	V _R = 5V	I _R			10	uA
Luminous Intensity	I _F = 20mA	I _v		13		mcd
Spectral Bandwidth	I _F = 20mA	Δλ		35		nm
Wavelength	I _F = 20mA	λ _P				nm
	I _F = 20mA	λ _D		606		nm
Viewing Angle	I _F = 20mA	2 θ _{1/2}		80		deg

Package

Item: 300

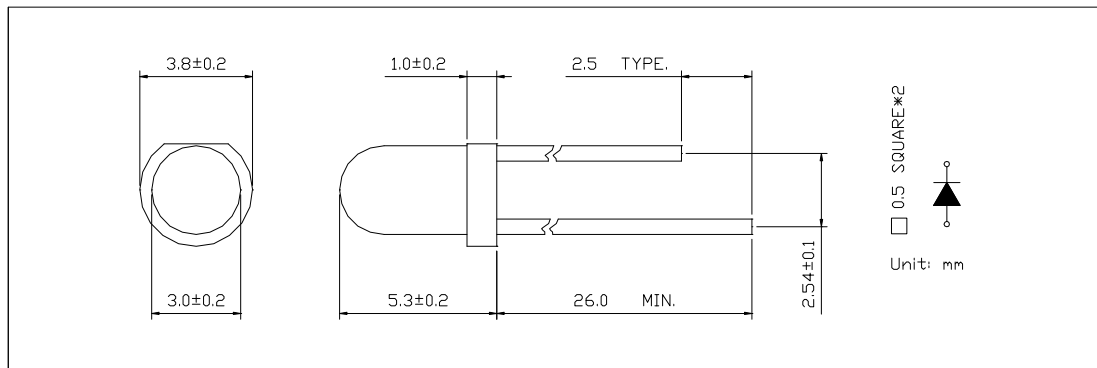

13APR29B