



# YETDA INDUSTRY LTD.

## 2.3" 5mm 8\*8 RED & PURE-GREEN DOT MATRIX DISPLAY

### M-20884AICIPG11

#### DESCRIPTION

- \* 2.3" (53.34mm) Inch Matrix Height.
- \* Super Bright Red & Green Dot Matrix.
- \* Black Face and White Dot Color.
- \* Row Common Anode.

#### ABSOLUT MAXIMUM RATINGS AT Ta=25°C

Parameter		UNIT
Power Dissipation Per Dot	40	mW
Peak Forward Current Per Dot	120	mA
Forward current Per Dot (Static)	30	mA
Reverse Voltage Per Dot	5	V
Operation Temperature Range	-25°C TO +80°C	°C
Storage Temperature Range	-25°C TO +100°C	°C
Lead Soldering Temperature	260°C for 3 seconds 1.6mm(1/16 inch) from body	

#### ELECTRICAL/OPTICAL CHARACTERISTIC AT Ta=25°C

##### RED

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Average Luminous Intensity	Iv	200	210		mcd	If=20mA
Peak Emission Wavelength	λ d	620	625	630	nm	If=20mA
Forward Voltage Per Dot	Vf		2.0	2.4	V	If=20mA
Reverse Current Per Dot	Ir			10	uA	Vr=5V
Luminous Intensity Matching Ratio	Iv-m	2 : 1				If=20mA

#### ELECTRICAL/OPTICAL CHARACTERISTIC AT Ta=25°C


##### GREEN

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Average Luminous Intensity	Iv	220	250		mcd	If=20mA
Peak Emission Wavelength	λ d	520	525	530	nm	If=20mA
Forward Voltage Per Dot	Vf		3.0	3.4	V	If=20mA
Reverse Current Per Dot	Ir			10	uA	Vr=5V
Luminous Intensity Matching Ratio	Iv-m	2 : 1				If=20mA




# YETDA INDUSTRY LTD.

## P.C.B. Pin Connection

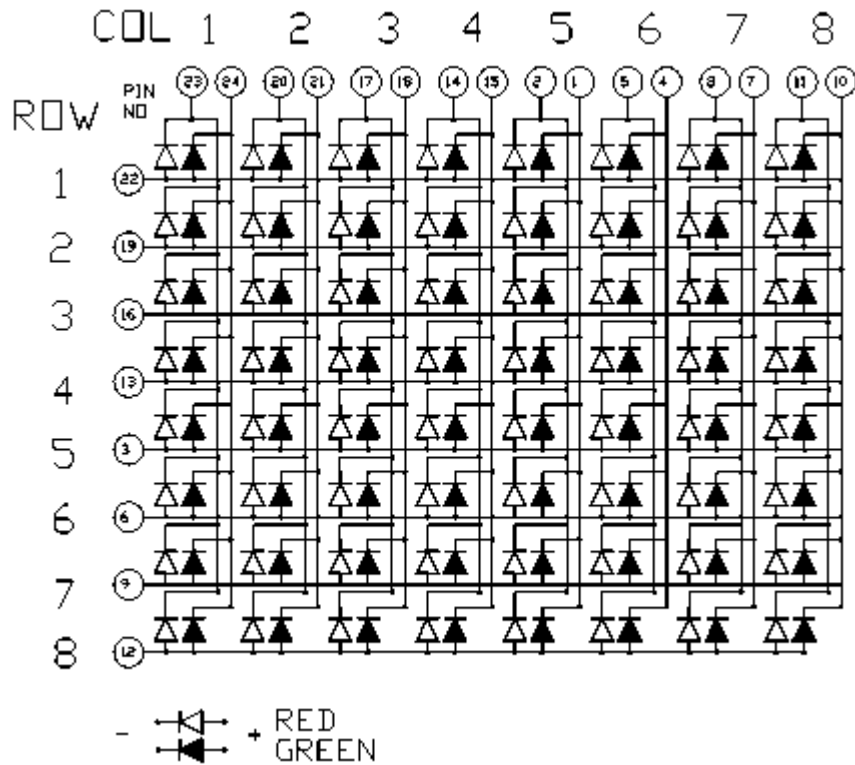

## Reflector Dimensions

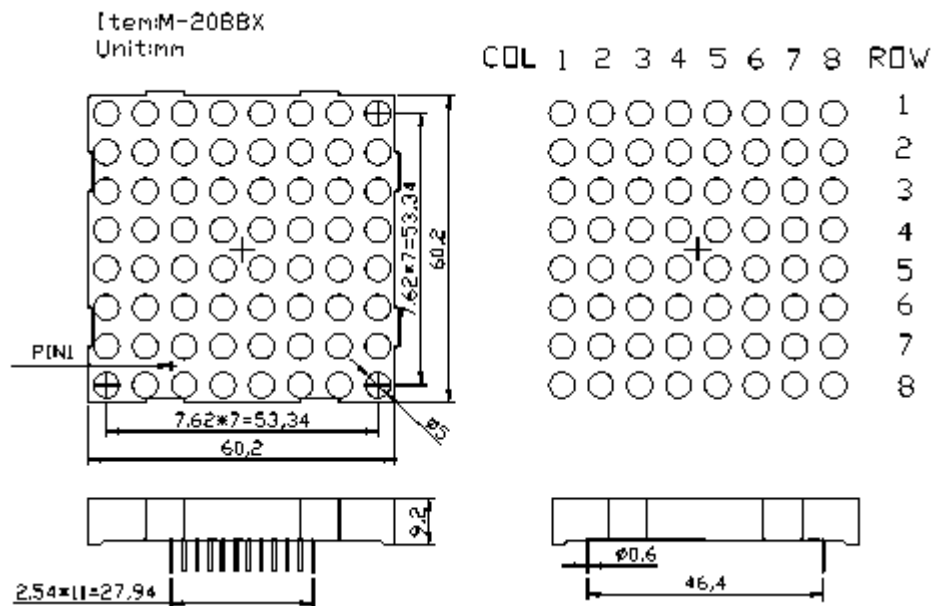

Unit: mm