



YETDA INDUSTRY LTD.

5mm Blue Color LED Lamps S518TB4G

- * 5mm Ultra Blue color with InGaN Dice.
- * Encapsulated with Water Clear Package with 2 leads.


Absolute Maximum Ratings : (Ta=25°C)

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	PD	70	mw
Reverse Voltage	VR	5	V
Average Forward Current	LAF	25	mA
Peak Forward Current (Duty=0.1,1KHZ)	IPF	80	mA
Operatating Temperature Range	T _{OPR}	-20°C to +70	°C
Storage Temperature Range	T _{STG}	-40°C to +80	°C
Lead Soldering Temperature { 1.6mm(0.063inch) From Body } 260°C For 3 Seconds			

Electro-Optical Characteristics (Ta = 25°C)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	I _F = 20mA	V _F	2.8	3.0	3.3	V
Reverse Current	V _R = 5V	I _R		2.5	5	uA
Luminous Intensity	I _F = 20mA	I _v	250	300	350	mcd
Dominant Wavelength	I _F = 20mA	λ _d	450	453	456	nm
Viewing Angle	I _F = 20mA	2θ 1/2		160		deg

Item: 518

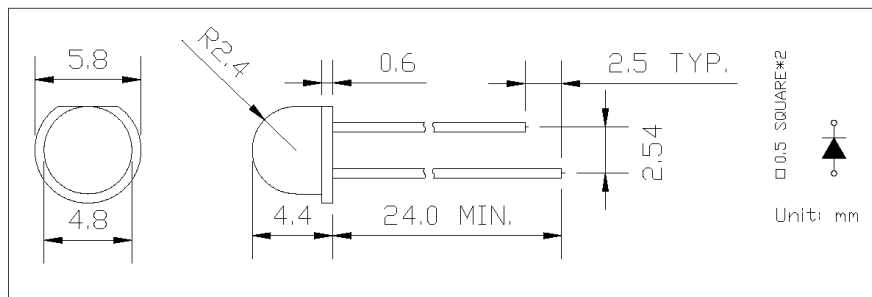



YETDA INDUSTRY LTD.

Fig 1. Forward Current vs. Forward Voltage

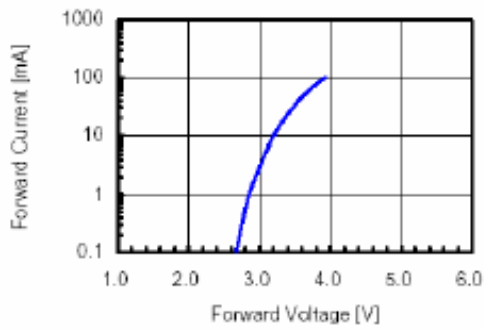


Fig 2. Relative Intensity vs. Forward Current

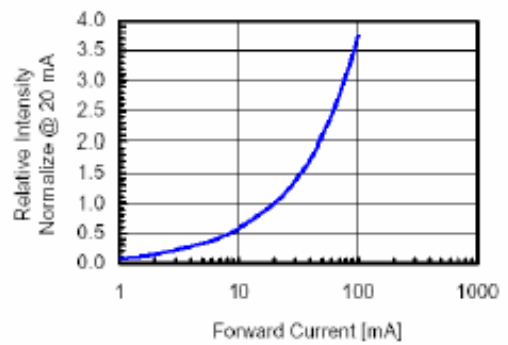


Fig 3. Forward Voltage vs. Temperature

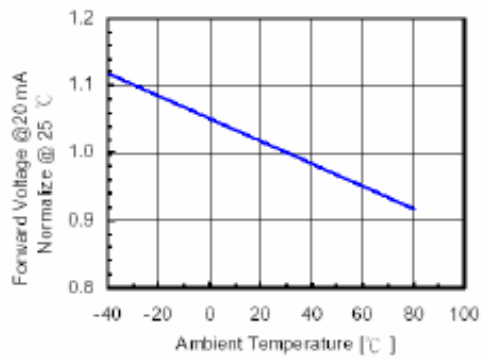


Fig 4. Relative Intensity vs. Temperature


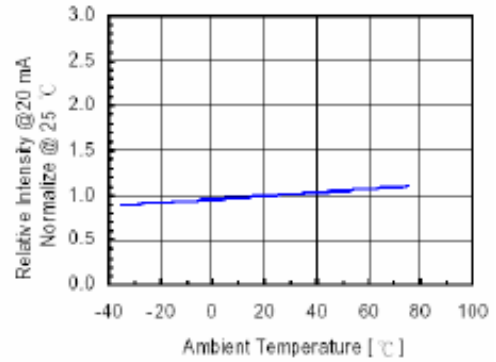


Fig 5. Relative Intensity vs. Wavelength



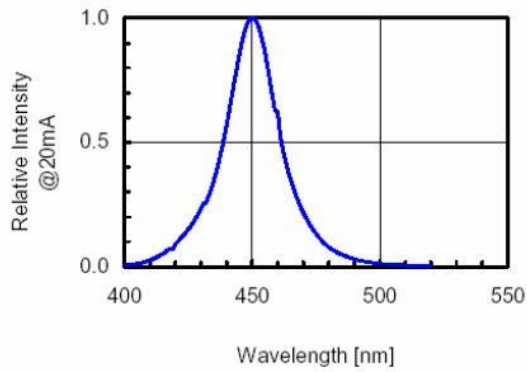

YETDA INDUSTRY LTD.

•Soldering:


1. Manual of soldering

The temperature of the iron tip should not be higher than 260°C and Soldering within 3 seconds per solder-land is to be observed

2. DIP soldering (Wave Soldering):

Preheating: $120^{\circ}\text{C} \sim 150^{\circ}\text{C}$ within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching)

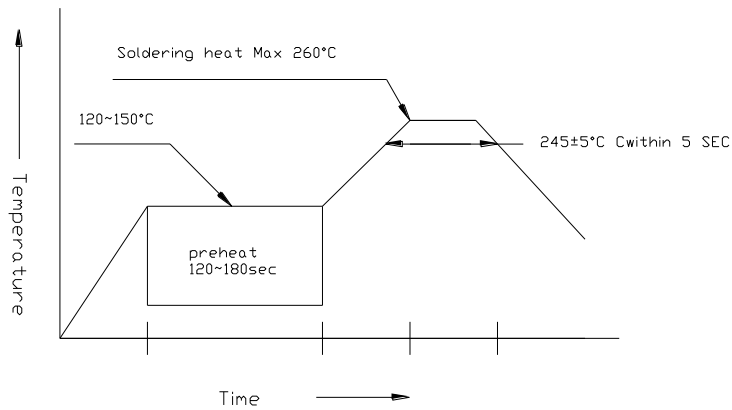

•Handling:

Care must be taken not to cause to the epoxy resin portion of Yetda LEDS while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of Yetda LEDS with hard or sharp article such as the sand blast and the metal hook